


LRS-20

Modular Converter Rack

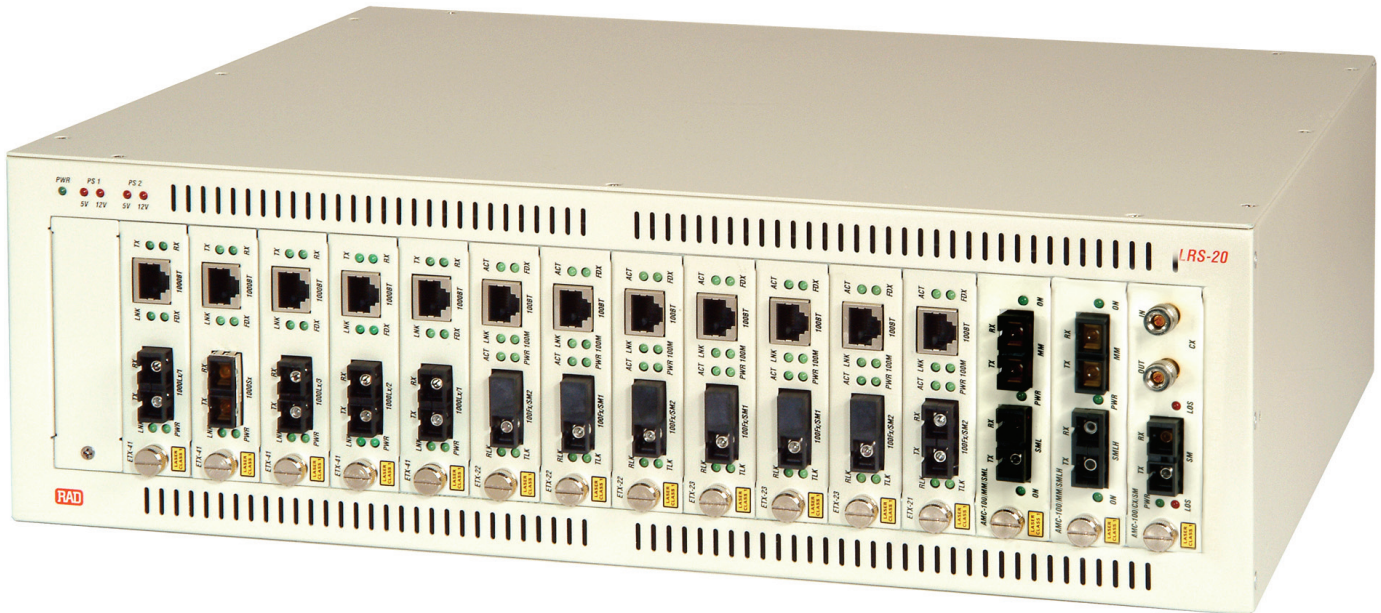

FEATURES

- Modular rack for the AMC-100 and ETX converter cards
- 16-slot compact enclosure
- Single chassis for converting various media types
- Hot-swappable converter cards
- Optional common logic module for point-to-point applications, requiring management
- Remote software download to the common logic module via TFTP
- Dual hot-swappable AC and DC power supply modules for load sharing and redundancy

DESCRIPTION

- LRS-20 is a 16-slot 3U-high modular rack, accommodating up to 16 hot-swappable converter cards.
- The rack provides high port density, when several media converters have to be installed at the same site.
- The converter cards are hot-swappable, allowing module insertion and removal without affecting active services.
- A common logic card can be installed in LRS-20, providing one terminal port for an ASCII terminal connection and one 10/100BaseT port for connecting Telnet hosts or SNMP network manager stations.
- LRS-20 is a compact 3U-high, ETSI-complaint chassis. Card insertion, LEDs, cable connections (except for the power cables) are at the front of the chassis.

- The chassis operates with single or dual, AC or DC power supplies. Each power supply supports a fully populated LRS-20 rack. A power supply can be replaced during operation, without affecting system performance (hot swapping).
- The chassis can be mounted in a standard 19-inch rack.

LRS-20

Modular Converter Rack

SPECIFICATIONS

- **Number of Slots**
15
- **Indicators**
PWR (green):
On – Power supplies are in working condition
Off – Power supply malfunction has been detected
PS 1 5V / PS 2 5V (red):
On – 5V output voltage is not provided by power supply 1/2 to the cards
Off – 5V output voltage is provided by power supply 1/2 to the cards
PS 1 12V / PS 1 12V (red):
ON – 12V output voltage is not provided by power supply 1/2 to the fans
OFF – 12V output voltage is provided by power supply 1/2 to the fans
- **Power**
AC: 115 VAC or 230 VAC,
50/60 Hz
DC: -48 VDC
- **Power Consumption**
120W max

- **Physical**
Height: 132 mm (5.2 in)
Width: 440 mm (17.2 in)
Depth: 425 mm (16.7 in)
Weight: 14 kg (30.8 lb)
- **Environment**
Operating temperature:
10–50°C (50–122°F)
Storage temperature:
-40–50°C (-40–176°F)
Humidity: Up to 85%,
non-condensing

COMMON LOGIC CARD

- **LAN Interface**
Number of ports: 1
Type: 10/100BaseT
Connectors: RJ-45
- **Terminal Interface**
Number of ports: 1
Type: RS-232
Data rate: 19.2 kbps
Connector: RJ-45
- **Indicators**
SYS (green) – Operation status
PWR (green) – Power status
LNK/ACT (green) – Ethernet link status
100M (green) – 10/100BaseT interface data rate

ORDERING

LRS-20*/#/&

Modular converter rack

LRS-20-PS/*

Power supply module for LRS-20

* Specify power supply type:

115 for 115 VAC

230 for 230 VAC

48 for -48 VDC

Specify **R** for redundant power supply (same type as the first power supply)

& Specify **MNG** for common logic module

SUPPLIED ACCESSORIES


Power cord for each ordered power supply

RM kit for mounting LRS-20 into a 19-inch rack

CBL-LRS-20-CLI

RJ-45 to DB-9 adapter cable for an ASCII terminal connection

APPLICATION

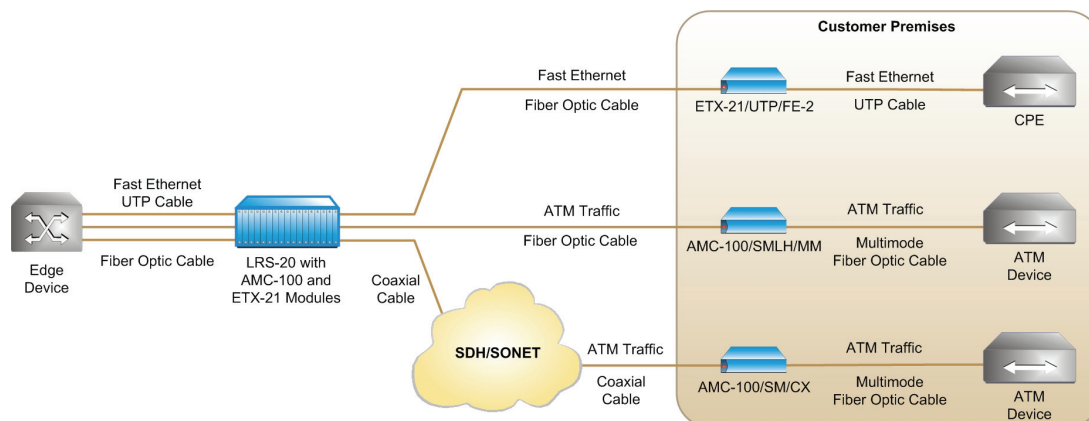

data communications

www.rad.com

- **International Headquarters**
24 Raoul Wallenberg Street
Tel Aviv 69719, Israel
Tel: 972-3-6458181
Fax: 972-3-6498250
Email: market@rad.com

- **North America Headquarters**
900 Corporate Drive
Mahwah, NJ 07430, USA
Tel: (201) 529-1100
Toll free: 1-800 444-7234
Fax: (201) 529-5777
Email: market@radusa.com

438-100-06/06