

# ETX-202

## Carrier Ethernet Demarcation Device



Smart demarcation point between the service provider and customer networks

**EtherAccess**

- SLA monitoring to assure delivery of contracted Ethernet services
- VLAN bridging and stacking with P-bit, DSCP, Per Port or ToS traffic prioritization
- Complete Ethernet OAM and Layer-2 loopback functionality for reduced Opex
- Network link protection based on 802.3ad or dual homing for increased service resiliency
- Up to two Fast or Gigabit Ethernet network ports and up to four Fast or Gigabit Ethernet user ports

ETX-202 is a carrier-class demarcation device owned and operated by the service provider and installed at the customer premises.

Providing monitoring and diagnostic as well as QoS capabilities, ETX-202 focuses on the service and allows the service provider to achieve end to end rather than edge-to-edge service control.

IP address, IP mask and default gateway can be automatically obtained using DHCP.

### ETHERNET CAPABILITIES

ETX-202 features an internal bridge, operating in VLAN-aware and VLAN-unaware modes.

VLAN stacking can be used for traffic separation between different users or services by defining a Service VLAN ID per customer or service. When VLAN stacking is used, a Service VLAN tag is added to the user traffic and removed from network traffic. Both Service VLAN ID and Service VLAN priority can be defined.



**data communications**  
The Access Company

The unit provides a user-configurable fault propagation mechanism. When a link failure is detected at the network port, ETX-202 optionally shuts down a user port until the network link is restored.

### LAYER-2 LOOPBACK WITH MAC SWAPPING

Layer-2 link integrity can be tested by a non-disruptive loopback with MAC address swapping. When the loopback is activated, ETX-202 exchanges source and destination MAC addresses of the incoming packets. This loopback can be performed per VLAN (or EVC), it passes through Ethernet bridges and does not disrupt traffic flows, which are not being tested.

### ETHERNET OAM

ETX-202 provides comprehensive Ethernet OAM capabilities:

- End-to-end OAM based on IEEE 802.1ag and ITU-T Y.1731 enable Ethernet service providers to monitor their services proactively, measure end-to-end performance and guarantee that the customers receive the contracted SLA.

- Performance monitoring includes Frame Delay, Frame Delay Variation, Frame Loss and Availability.
- Single segment (link) OAM according to IEEE 802.3ah for remote management and fault indication, including remote loopback, dying gasp, and MIB parameters retrieval.

### NETWORK INTERFACE REDUNDANCY

The unit supports two redundancy modes:

- Link aggregation (1+1) based on IEEE 802.3ad
- Dual homing (1:1), allowing ETX-202 to be connected to two different upstream devices.

### PORT COMBINATIONS

ETX-202 offers flexible network and user port combinations:

- Port 1 and 2 – Any Gigabit Ethernet fiber optic SFP or 1000BaseT
- Port 3–6 – Any Gigabit Ethernet fiber optic SFP or 1000BaseT.

### QoS

Different service types require different levels of QoS to be provided end-to-end. QoS can be defined per subscriber as well as per service. QoS has two aspects: rate limitation and traffic prioritization.

Hierarchical rate limitation defines peak traffic rate per user, port service or per traffic aggregate. This maximizes bandwidth utilization.

For prioritizing user traffic, ETX-202 features up to four separate queues, which handle traffic with different service demands, such as real-time traffic, premium data or best-effort data. In case of congestion, the relevant service receives higher priority at the customer premises.

Traffic can be classified dynamically and mapped to different priority queues according to VLAN priority, DSCP, Per Port or ToS. Appropriate QoS can be achieved without customer marking, by mapping different services and different user ports (port-based priority).

### MANAGEMENT

The unit can be managed using the following ports and applications:

- Local management via an ASCII terminal connected to the RS-232 port
- Remote inband management via network ports. Remote management via Telnet, Web browser or RADview-EMS (RAD's SNMP-based management system).

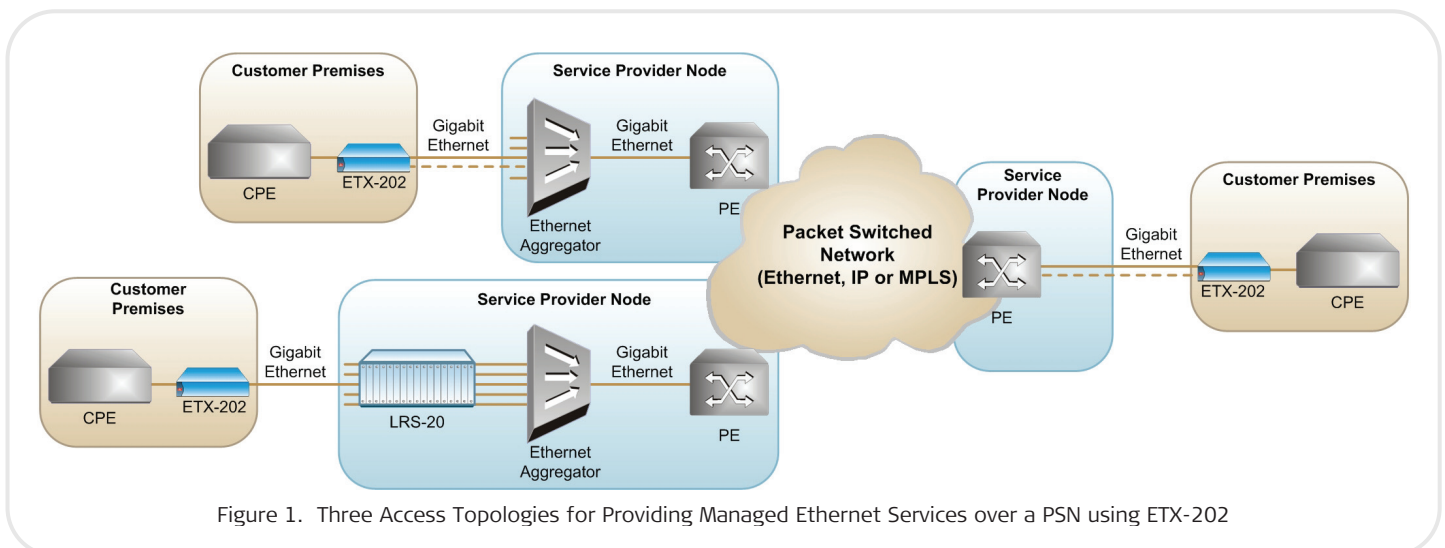


Figure 1. Three Access Topologies for Providing Managed Ethernet Services over a PSN using ETX-202

Management traffic can be separated from user data by creating a dedicated management VLAN.

Up to ten different stations can manage ETX-202 simultaneously, enabling monitoring the network status from different locations.

The following security protocols are provided by ETX-202 to ensure client-server communication privacy and correct user authentication:

- RADIUS (client authentication only)
- SSL for Web-based management
- SSH for Secure Shell Telnet session
- SNMPv3 for secure SNMP sessions.

#### REMOTE MONITORING

ETX-202 uses the Syslog protocol to generate and forward event notifications over IP networks.

ETX-202 supports DDM (Digital Data Management) SFPs according to SFF-8472 Version 9.3.

#### COLLECTING TFTP STATISTICS

ETX-202 supports collecting TFTP statistics via RAD's SNMP-based management system for upload to the NMS.

#### MEF-9, MEF-14 CERTIFICATION

ETX-202 is certified by the Metro Ethernet Forum for EPL services (MEF-9, MEF-14).

#### TYPICAL APPLICATIONS

ETX-202 provides access to packet switched networks (Ethernet, IP/MPLS), as well as next-generation SDH/SONET backbones over Ethernet, using standard fiber optic interfaces. Access to legacy networks is possible when the edge devices include tributary Ethernet ports (see Figure 2). The termination unit can be used for site-to-site connectivity (E-line), and for multiple site connectivity (E LAN), depending on the network topology.

#### ENVIRONMENT

ETX-202/H is a temperature-hardened version with matching SFPs intended for industrial installations.

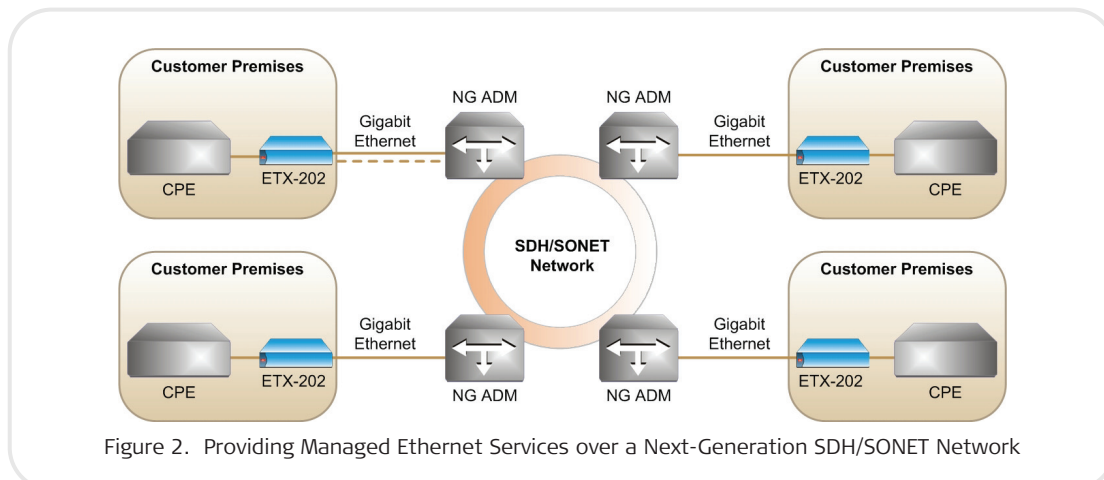


Figure 2. Providing Managed Ethernet Services over a Next-Generation SDH/SONET Network

## Specifications

### NETWORK INTERFACE - FIBER OPTIC

#### Number of Ports

Up to 2 (redundancy)

#### Type

Fast Ethernet (100BaseFx, 100BaseLX10, 100BaseBx10), SFP-based

Gigabit Ethernet (1000BaseSx, 1000BaseLX10, 1000BaseBx10), SFP-based

#### Fast Ethernet SFPs

- SFP-1: 1310 nm, 2 km (1.2 miles)
- SFP-1D: 1310 nm, 2 km (1.2 miles), internal calibration, DDM
- SFP-2: 1310 nm, 15 km (9.3 miles)
- SFP-2D: 1310 nm, 15 km (9.3 miles), DDM, internal calibration
- SFP-2H: 1310 nm, 15 km (9.3 miles), temperature-hardened
- SFP-3: 1310 nm, 40 km (24.8 miles)
- SFP-3D: 1310 nm, 40 km (24.8 miles), DDM, internal calibration
- SFP-3H: 1310 nm, 40 km (24.8 miles), temperature-hardened
- SFP-4: 1550 nm, 80 km (49.7 miles)
- SFP-4D: 1550 nm, 80 km (49.7 miles), internal calibration, DDM
- SFP-10a: Tx – 1310 nm, Rx – 1550 nm, single fiber, 20 km (12.4 miles)
- SFP-10b: Tx – 1550 nm, Rx – 1310 nm, single fiber, 20 km (12.4 miles)
- SFP-18a: Tx – 1310 nm, Rx – 1550 nm, single fiber, 40 km (24.8 miles)
- SFP-18b: Tx – 1550 nm, Rx – 1310 nm, single fiber, 40 km (24.8 miles)
- SFP-19a: Tx – 1490 nm, Rx – 1570 nm, single fiber, 80 km (49.7 miles)
- SFP-19b: Tx – 1570 nm, Rx – 1490 nm, single fiber, 80 km (49.7 miles).

#### Gigabit Ethernet SFPs

- SFP-5: 1310 nm, 0.55 km (0.3 miles)
- SFP-5D: 1310 nm, 0.55 km (0.3 miles), DDM, internal calibration
- SFP-5H: 1310 nm, 0.55 km (0.3 miles), temperature-hardened
- SFP-5DH: 1310 nm, 0.55 km (0.3 miles), DDM, internal calibration, temperature-hardened

- SFP-6: 1310 nm, 10 km (6.2 miles)
- SFP-6D: 1310 nm, 10 km (6.2 miles), DDM, internal calibration
- SFP-6H: 1310 nm, 10 km (6.2 miles), temperature-hardened
- SFP-7: 1550 nm, 80 km (49.7 miles)
- SFP-7D: 1550 nm, 80 km (49.7 miles), DDM, internal calibration
- SFP-8: 1310 nm, 40 km (24.8 miles)
- SFP-8D: 1310 nm, 40 km (24.8 miles), DDM, internal calibration
- SFP-8H: 1310 nm, 40 km (24.8 miles), temperature-hardened
- SFP-8DH: 1310 nm, 40 km (24.8 miles), DDM, internal calibration, temperature-hardened
- SFP-17a: Tx – 1310 nm, Rx – 1490 nm, single fiber, 10 km (6.2 miles)
- SFP-17b: Tx – 1490 nm, Rx – 1310 nm, single fiber, 10 km (6.2 miles)
- SFP-20: 1550 nm, 120 km (74.5 miles)
- SFP-22a: Tx – 1490 nm, Rx – 1570 nm, single fiber, 80 km (49.7 miles)
- SFP-22b: Tx – 1570 nm, Rx – 1490 nm, single fiber, 80 km (49.7 miles).

**Note:** It is strongly recommended to order this device with **original RAD SFPs installed**. This will ensure that prior to shipping, RAD has performed comprehensive functional quality tests on the entire assembled unit, including the SFP devices. RAD cannot guarantee full compliance to product specifications for units using non-RAD SFPs. For detailed specifications of the SFP transceivers, refer to the SFP Transceivers data sheet.

#### Connector

LC

### NETWORK INTERFACE - COPPER

#### Type

10/100/1000BaseT

#### Connector

RJ-45

### USER INTERFACE – FIBER OPTIC

#### Number of Ports

Up to 4 (ports 3–6)

#### Type

Gigabit Ethernet (1000BaseSx, 1000BaseLX10, 1000BaseBx10), SFP-based

#### Gigabit Ethernet SFPs

Refer to the network interface specifications

### USER INTERFACE – COPPER

#### Number of Ports

Up to 4 (ports 3–6)

#### Type

10/100/1000BaseT

#### Connector

RJ-45

### GENERAL

#### Certifications

MEF-9 EPL, MEF-14 EPL

#### Compliance

IEEE 802.3, 802.3u, 802.1D, 802.1Q, 802.1p, 802.1ag, 802.3ad, 802.3ah

#### Maximum Frame Size

4,096 bytes

#### MAC Address Table Size

8,192 entries

#### Management

- Out-of-band: via dedicated terminal port; V.24/RS-232 DCE; 9.6, 19.2, 115.2 kbps; DB-9 female connector
- Inband: via network or user ports

#### Power

AC/DC: 100–240 VAC or 48/60 VDC  
WRDC: 24 VDC nominal (18–36 VDC)

#### Power Consumption

9W max

#### Physical

ETX-202: Height: 43.7 mm (1.7 in)  
Width: 215 mm (8.4 in)  
Depth: 147 mm (5.8 in)  
Weight: 0.7 kg (1.5 lb)

ETX-202/H: Height: 43.7 mm (1.7 in)  
Width: 215 mm (8.4 in)  
Depth: 300 mm (11.8 in)  
Weight: 1.9 kg (4.2 lb)

#### Environment

Temperature:

ETX-202: 0–50°C (32–122°F)

ETX-202/H: -40–65°C (-40–149°F)

Humidity: Up to 90%, non-condensing

Table 1. ETX Family Comparison Table

Feature	ETX-102 (Ver. 3.6)	ETX-201 (Ver. 3.6)	ETX-202 (Ver. 3.6)	ETX-202A (Ver. 1.2)
Network interface	2 × Fast Ethernet	Up to 2 × Gigabit or Fast Ethernet (auto-detect) One interface may be configured as user or network interface	2 × Gigabit Ethernet	2 × Gigabit Ethernet
User interface	Up to 4 × Fast Ethernet	1× Gigabit or Fast Ethernet (if one network interface is configured as user interface) and up to 4 × Fast Ethernet	Up to 4 × Gigabit Ethernet	Up to 4 × Gigabit Ethernet
Service type	EPL (port-based)	EPL (port-based)	EPL (port-based)	EVPL (flow-based)
Forwarding mode	VLAN-aware/unaware bridging, 8K MAC addresses	VLAN-aware/unaware bridging, 8K MAC addresses	VLAN-aware/unaware bridging, 8K MAC addresses	Flow-based forwarding
QoS	Rate limitation Traffic classification (802.1p bits, ToS, DSCP, port-based)	Rate limitation Traffic classification (802.1p bits, ToS, DSCP, port-based)	Rate limitation Traffic classification (802.1p bits, ToS, DSCP, port-based)	Rate limitation per flow Traffic classification (Port-based, VLAN, 802.1p bits, ToS, DSCP) Shaping
Bandwidth profile	CIR/CBS per port	CIR/CBS per port	CIR/CBS per port	CIR/CBS, EIR/EBS per EVC.COS
Remote management	Telnet, Web, RADview	Telnet, Web, RADview	Telnet, Web, RADview	Telnet, Web, RADview

## ETX-202

## Carrier Ethernet Demarcation Device

## Ordering

## ETX-202/?/!/+/2/+3

## Legend

? Power supply type (Default=AC/DC wide-range power supply):

**WRDC** 24 to -48 VDC power supply

*Note: The wide-range DC power supply is available only for units with temperature-hardened enclosures.*

! Temperature range (Default=Regular enclosure):

**H** Temperature-hardened enclosure

*Note: The ETX-202/H version requires temperature-hardened SFP transceivers.*

+1 Port 1 (network) interface type:

**UTP** Built-in 10/100/1000BaseT

**SFP-2** SFP-2 transceiver

**SFP-2H** SFP-2H transceiver

**SFP-3** SFP-3 transceiver

**SFP-5** SFP-5 transceiver

**SFP-6** SFP-6 transceiver

**SFP-7** SFP-7 transceiver

**SFP-8** SFP-8 transceiver

**SFP-17A** SFP-17a transceiver

**SFP-17B** SFP-17b transceiver

**SFP-20** SFP-20 transceiver

**SFP-22A** SFP-22a transceiver

**SFP-22B** SFP-22b transceiver

**NULL** Empty SFP slot

+2 Port 2 (network/user) interface type: Refer to the network port 1 options

+3 Port 3-6 (user) interface type and combination:

**1UTP** Port 3 with UTP (built-in 10/100/1000BaseT)

**1SFP-5** Port 3 with SFP-5

**1SFP-6** Port 3 with SFP-6

**1SFP-7** Port 3 with SFP-7

**1SFP-8** Port 3 with SFP-8

**1NULL** Port 3 with empty SFP slot

**1NullUTP** Port 3 with empty SFP slot, port 4 with UTP

**2Null-2UTP** Port 3-4 with SFP-8, port 5-6 with UTP

**4UTP** Port 3-6 with UTP

**4SFP-5** Port 3-6 with SFP-5

**4SFP-6** Port 3-6 with SFP-6

**4SFP-7** Port 3-6 with SFP-7

**4SFP-8** Port 3-6 with SFP-8

**4NULL** Port 3-6 with empty SFP slots

## SUPPLIED ACCESSORIES

AC power cord  
DC power connection kit

## OPTIONAL ACCESSORIES

**RM-35/@**

Hardware kit for mounting one or two ETX-202 units in a 19-inch rack

@ Rack mounting kit type:

**P1** Kit for mounting one unit

**P2** Kit for mounting two units

**CBL-DB9F-DB9M-STR**

Control port cable

## International Headquarters

24 Raoul Wallenberg Street  
Tel Aviv 69719, Israel  
Tel. 972-3-6458181  
Fax 972-3-6498250, 6474436  
E-mail market@rad.com

## North America Headquarters

900 Corporate Drive  
Mahwah, NJ 07430, USA  
Tel. 201-5291100  
Toll free 1-800-4447234  
Fax 201-5295777  
E-mail market@radusa.com

www.rad.com



data communications

The Access Company