

MiTOP-E1/T1

SFP-Format TDM Pseudowire Gateway



TDM circuit emulation
over packet-switched
networks

**TDM IP
Driven®**

- TDM circuit emulation over a packet-switched network (PSN) with CESoPSN (RFC 5086) and SAToP (RFC 4553) payload encapsulation
- SFP enclosure
- ASIC-based architecture for minimizing processing delay
- Advanced clock distribution mechanism, and configurable jitter buffer
- Comprehensive OAM and performance monitoring

MiTOP-E1/T1 is a TDM pseudowire (PW) access gateway extending TDM-based services over packet-switched networks.

Housed in a Small Form-Factor Pluggable (SFP) enclosure, it is designed for quick and simple insertion into any 100BaseFx Ethernet device port with an MSA-compatible socket.

MiTOP-E1/T1 is simple and cost-effective alternative to external, standalone gateways or conversion cards for each user device, saving on space, power consumption, cabling, and simplifying management.

PSEUDOWIRE PERFORMANCE

The gateway provides a legacy over PSN solution for transmitting E1/T1 streams over packet switched networks. The device converts the data stream from its user E1/T1 ports into packets for transmission over the network. The addressing scheme of these packets is UDP/IP, MPLS or MEF. These packets are transmitted via a 100BaseFx port of the host device to the PSN. A remote pseudowire gateway converts the packets back to TDM traffic.

High-performance ASIC-based buffering and forwarding techniques are used to achieve minimal end-to-end processing delay.

Configurable packet size allows to achieve proper balance between PSN throughput and delay.

Large configurable jitter buffer per each PW connection compensates for the delay variation introduced by the PSN.

The gateway supports the following encapsulation methods:

- Payload – CESoPSN and SAToP
- Network – MPLS, MEF, UDP/IP.

SFP ENCLOSURE

Housed in a Small Form Factor Pluggable (SFP) package, MiTOP-E1/T1 complies with the Multi-Source Agreement.

Running on power derived from the host device, it requires no additional power supply.

MiTOP-E1/T1 is hot-swappable and features a special release mechanism for easy extraction from the SFP socket.

PSEUDOWIRE QoS/CoS

For Ethernet networks – the outgoing pseudowire packets are assigned a dedicated VLAN ID according to 802.1Q and marked for priority using 802.1p bits.



data communications

The Access Company

MiTOP-E1/T1

SFP-Format TDM Pseudowire Gateway

For IP networks – the outgoing pseudowire packets are marked for priority using ToS (including the DSCP and Diffserv bits).

For MPLS networks – the outgoing pseudowire packets are assigned to a specific MPLS tunnel and marked for priority using EXP bits.

TIMING

Synchronization between TDM devices is maintained, by deploying advanced clock distribution mechanisms. The clocking options are:

- Internal – the master clock source for the TDM circuit is provided by the internal clock oscillator
- Loopback – the transmit clock is derived from the E1/T1 port's receive clock
- Adaptive – the clock is recovered from the PSN.

Advanced clock recovery conforms to G.823 using G.8261-defined scenarios.

Jitter and wander of the recovered clock are maintained at levels that conform to G.823/G.824 traffic. For adaptive clock recovery, the recovered clock performance depends on packet network characteristics.

TDM INTERFACE

The TDM port provides connectivity to any standard E1 or T1 device.

E1 and T1 interfaces support:

- G.703, G.704, framed and unframed modes
- SF and ESF framing (T1).

MiTOP-E1/T1 is transparent to all signaling protocols.

FAULT PROPAGATION

E1 or T1 loss of signal is propagated by sending an electrical LOS signal to the 100BaseFx port, and is visually indicated by the LOS LED (red) turning on. This in turn can automatically turn off the LAN link. Turning on/off the packet link is user-configurable (enabled or disabled).

MANAGEMENT

The units can be managed using different ports and applications:

- Out-of-band via I2C channel (of the SFP edge connector)
- Inband via the Ethernet port, using a Web browser.

Management traffic can run over a dedicated VLAN.

OAM AND PERFORMANCE MONITORING

RAD's TDM PW OAM mechanism verifies connectivity and prevents pseudowire configuration mismatch.

The following RFC-2495 E1/T1 physical layer performance statistics are available: BES, ES, SES and UAS.

DIAGNOSTICS

External and internal loopbacks can be used to check TDM link connectivity.

Alarms detected during operation are stored in a buffer holding up to 100 events.

CONFIGURATION ADAPTER

An optional configuration adapter is available for connecting MiTOP-E1/T1 to a PC via a USB 2.0 port.

The configuration adapter is used for the preliminary configuration of the gateways or software download to the units.

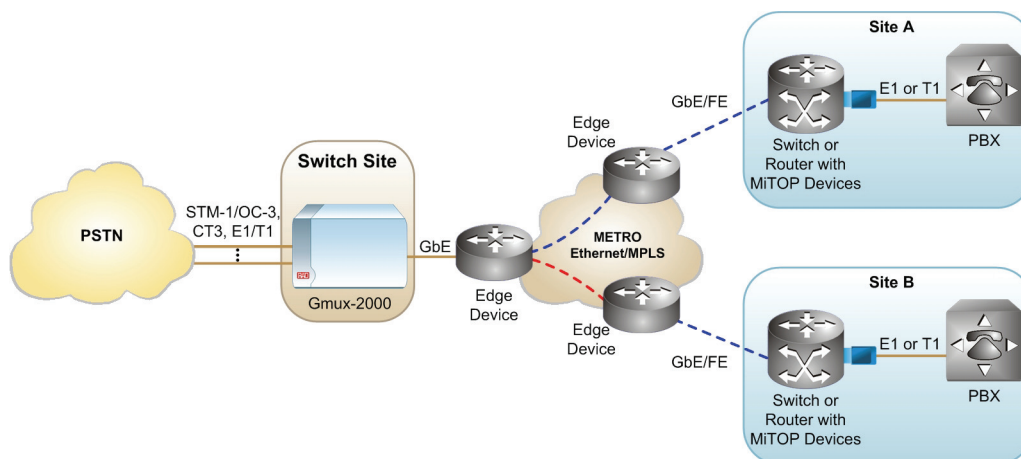


Figure 1. Aggregating TDM Services over PSN

Specifications

E1 INTERFACE

Number of Ports

1

Compliance

G.703, G.704, G.823

Data Rate

2.048 Mbps

Line Code

HDB3, AMI

Jitter and Wander Performance

Per ITU-T G.823

Framing

Framed, unframed

Line Impedance

120Ω, balanced

Cable Type

UTP CAT-5

Cable Length (max, 22 AWG wire)

Short haul: 770m (2530 ft)

Long haul: 2664m (8740 ft)

Connector

RJ-45

T1 INTERFACE

Number of Ports

1

Compliance

G.824, T1.403, G.703, G.823, T1-231, AT&T TR-62411

Data Rate

1.544 Mbps

Line Code

B8ZS, AMI

Jitter and Wander Performance

Per AT&T TR-62411, ITU-T G.823 , ITU-T G.824

Framing

Framed, unframed

Line Impedance

100Ω, balanced

Cable Type

UTP CAT-5

Cable Length (max, 22 AWG wire)

Short haul: 1192m (3910 ft)

Long haul: 2874m (9430 ft)

Connector

RJ-45

ETHERNET INTERFACE

Compliance

IEEE 802.3

Edge Connector

SFP-based, MSA-compliant

PSEUDOWIRE CONNECTIONS

Standard Compliance

CESoPSN: IETF RFC 5086

SAToP: IETF RFC 4553

MEF: MEF 8

Number of PW Connections

1

Jitter Buffer Depth

E1: up to 256 ms

Unframed T1: up to 340 ms

Framed T1: up to 256 ms

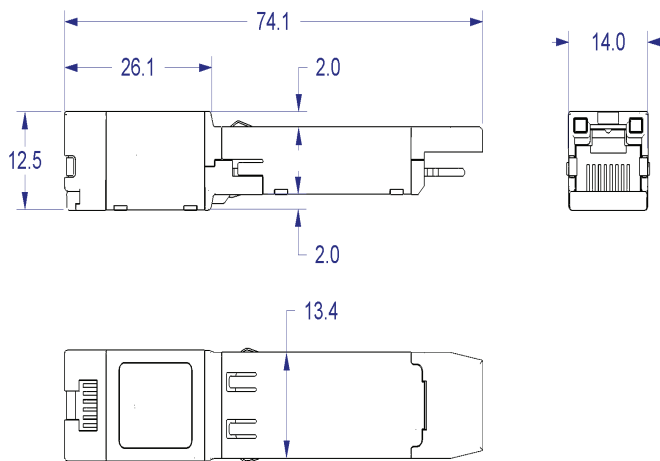


Figure 2 Physical Dimensions

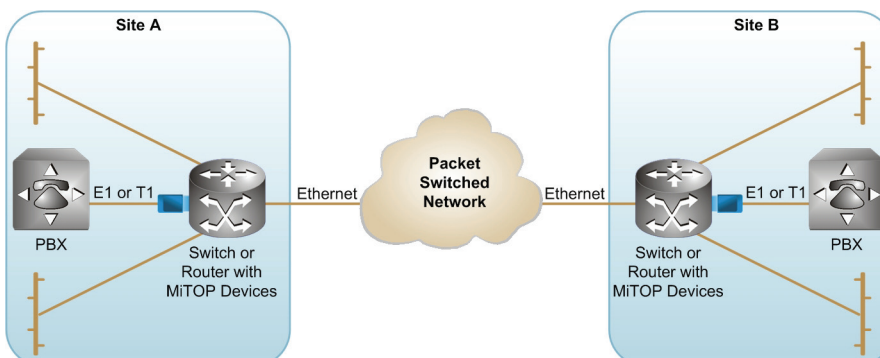


Figure 3 Delivering E1/T1 Services over PSN

MiTOP-E1/T1

SFP-Format TDM Pseudowire Gateway

GENERAL

Indicators

LINK (green) – Ethernet link status

LOS (red) – E1/T1 signal status

Timing

Internal, loopback or adaptive

Physical

Height: 12.5 mm (0.49 in)

Width: 14.0 mm (0.55 in)

Depth: 74.1 mm (2.91 in)

Weight: 30.0 g (1.0 oz)

Power Supply

3.3V, up to 330 mA

Power Consumption

1.1W

Environment

Operating temperature: -40 to 65°C
(-40 to 149°F)

Humidity: Up to 90%, non-condensing

Ordering

MiTOP-E1/T1

OPTIONAL ACCESSORIES

SFP-CA

Configuration adapter for connecting
MiTOP-E1/T1 to a PC

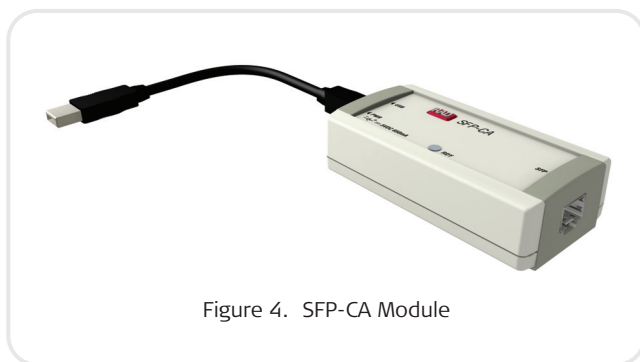


Figure 4. SFP-CA Module

International Headquarters

24 Raoul Wallenberg Street
Tel Aviv 69719, Israel
Tel. 972-3-6458181
Fax 972-3-6498250, 6474436
E-mail market@rad.com

www.rad.com

North America Headquarters

900 Corporate Drive
Mahwah, NJ 07430, USA
Tel. 201-5291100
Toll free 1-800-4447234
Fax 201-5295777
E-mail market@radusa.com



data communications

The Access Company